


Schnellmischer:  
 1.RW9532V6N 0,25kW 1500rpm 400V  
 2.RW9533V6N 0,12kW 680rpm 400V

Behälter KG Bremen GmbH & Co.  
 Theodor-Barth-Str. 25  
 28307 Bremen - Germany  
 Tel. +49 (0) 421 34 85 114  
 E-Mail: mail@behaelter-kg.de

Revisions					
Rev	Description	Date	Drawn	Checked	Rev. DD

Behälter Citernes - Vessels		TYPE VC-SLA	
Serial number	118 168 03 01	Stock nr.	EW10996V6LN / ID16.417
Geometrical volume	150 ℓ	Geometrical volume - jacket	-
Working pressure	Atmospheric	Working pressure - jacket	-
Working temperature	-10/80°C	Working temperature - jacket	-
Maximum density	1.2kg/dm³	Jacket pressure drop	-
Tare mass	70 kg	Material	1.4404 / AISI 316L
Equipment output/voltage	-	Year of manufacture	2018

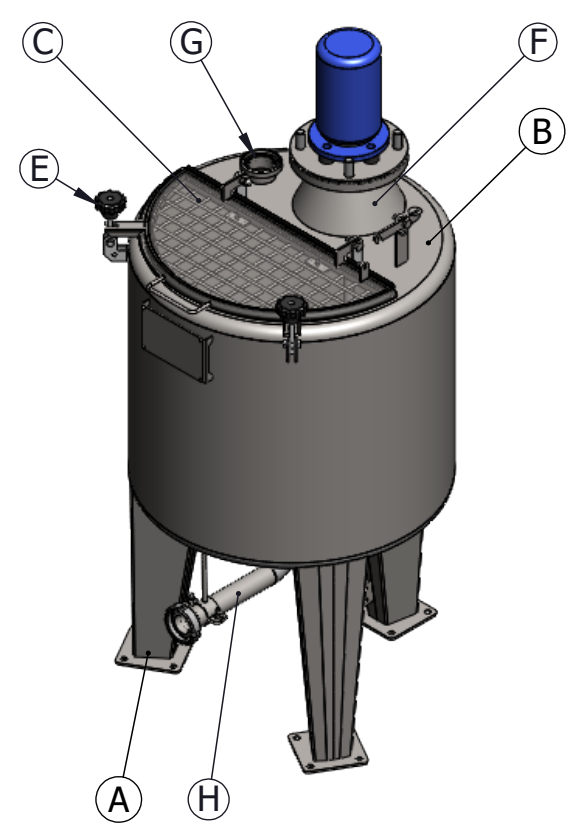

Behälter Citernes - Vessels		TYPE VC-SLA	
Serial number	118 168 03 02	Stock nr.	EW10996V6LN / ID16.418
Geometrical volume	150 ℓ	Geometrical volume - jacket	-
Working pressure	Atmospheric	Working pressure - jacket	-
Working temperature	-10/80°C	Working temperature - jacket	-
Maximum density	1.2kg/dm³	Jacket pressure drop	-
Tare mass	70 kg	Material	1.4404 / AISI 316L
Equipment output/voltage	-	Year of manufacture	2018

Item	Description	PN	DN	Qty.
		bar	mm.	
A	LEG ON ANCHOR PLATE *anchor bolts are not included	-	-	3
B	1/2 FIXED LID s=3mm	-	-	1
C	1/2 HINGED LID s=2mm	-	-	1
D	SAFETY GRID FOR 1/2 HINGED LID	-	-	1
E	TIGHTNER FOR HINGED LID	-	-	2
F	CONICAL INLET FOR AGITATOR UP TO FLANGE DN100 Ø220 s20 *agitator and mounting of the agitator are not included	atm.	100	1
G	INLET DN50 UP TO WELDING MALE DN50 DIN11851	atm.	50	1
H	DISMOUNTABLE TOTAL OUTLET UP TO WELDING LINER AND NUT DN40 DIN11851	atm.	40	1

Straightness, flatness and parallelism - EN 13920 F								Linear dimensions - EN 13920 B							
≥30	>120	>400	>1000	>2000	>4000	>8000	>12000	≥2	>30	>400	>1000	>2000	>4000	>8000	>12000
≤120	≤400	≤1000	≤2000	≤4000	≤8000	≤12000	≤16000	≤30	≤400	≤1000	≤2000	≤4000	≤8000	≤12000	≤16000
1	1.5	3	4.5	6	8	10	12	±1	±2	±3	±4	±6	±8	±10	±12

Surface	Outside	Matt 2B	Weld. seams	Outside	Strip grinded 2x20 Ra<1,6
	Inside	Matt 2B		Inside	Flat grinded to Ra<0,8

1.6	Drawn: K.N.	Scale 1:13	Weight 1.4404/ AISI 316L	118 168 03 EW10996V6LN/ID16.417- ID16-418	
	Checked: K.I.	TYPE VC-SLA-150L			
	Approved: D.M.				
		Rev	30.5.2018 r.	Lang Eng	Sheet 1/1