


slow

€ 2.160,-

power	0,75 kW
speed	66 rpm
spur gearbox:	✓
voltage	400 V 50 Hz
ISO-class	F
protection class	IP55
operating mode	S1
material	in contact with medium: 1.4571
shaft length	acc. to container size
stirrer	2 pieces cross-arm stirrers Ø 395 mm height-adjustable on the shaft
stirring shaft	is fixed to the gear motor by means of additional bearing
colour	RAL 5021
total weight	appr. 30 kg
agitator	with stainless steel pro- tective flange screwed on container cover
container cover	with seal
crane-eyes	3 pieces
addition	breathing nozzle

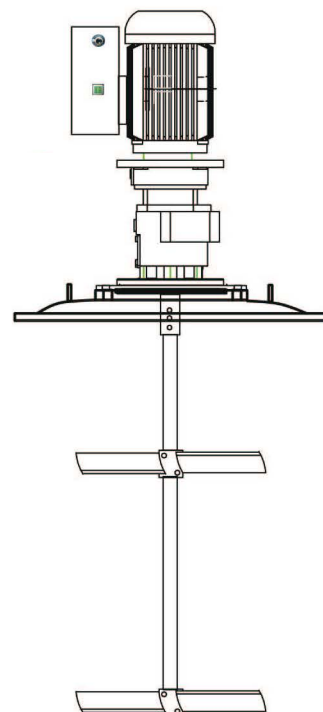

slow

€ 2.695,-

power	0,75 kW
speed	19 - 131 UpM continuously adjustable by means of frequency converter
voltage	1 Ph 230 V 50 Hz
ISO-class	F
protection class	IP55
operating mode	S1
material	in contact with medium: 1.4571
shaft length	acc. to container size
stirrer	2 pieces cross-arm stirrers Ø 395 mm height-adjustable on the shaft
colour	RAL 5010
agitator weight	appr. 32 kg
agitator	with stainless steel protective flange screwed on container cover
container cover	with seal
crane-eyes	3 pieces
addition	breathing nozzle

GET YOUR
OFFER NOW