

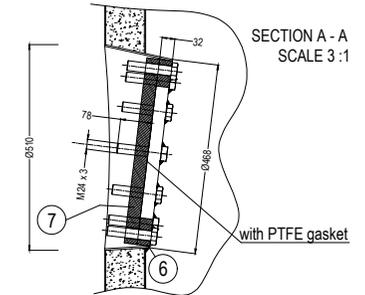

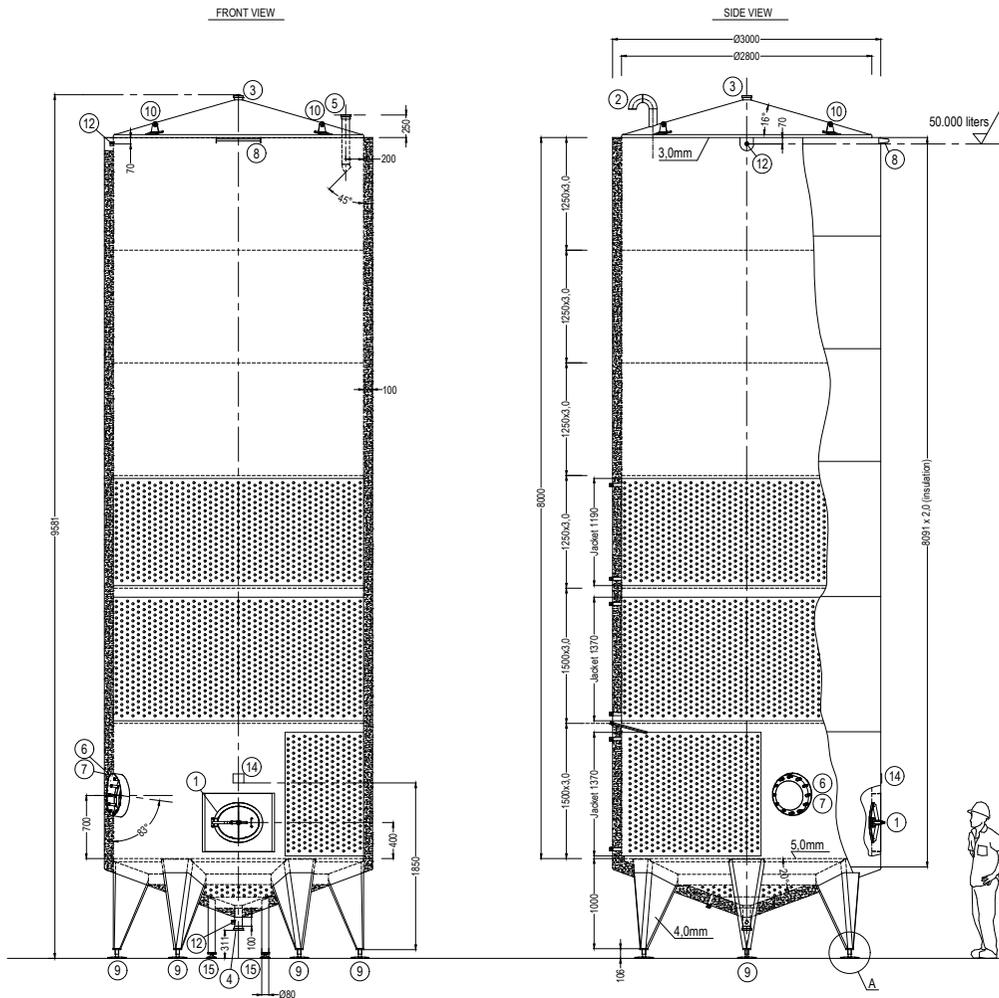


N°1 SCO / PT HL 500 - Ref. Lager 50mc

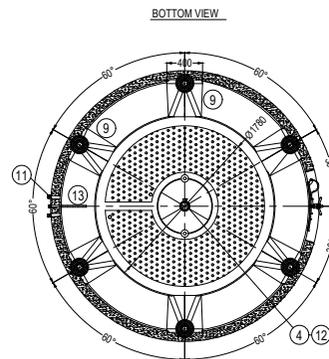

POS.	NAME	N.	MATERIAL
1	OVAL DOOR WITH DIM. 540 x 430 mm (mod. 200R with gasket in EPDM)	1	AISI 304L
2	VENT DEVICE WITH TWO BENDS 90° - 3" GAS (ISO 228 / 1)	1	AISI 304L
3	MALE FITTING DIN DN 80 ON THE TOP - DIN 11851	1	AISI 304L
4	MALE FITTING DIN DN 80 ON THE BOTTOM - DIN 11851	1	AISI 304L
5	INTERNAL LOADING PIPE DN 80 (With male fitting DIN DN 80 on the top)	1	AISI 304L
6	FLAT FLANGE UNI EN 1092-1 DN 300 PN 16 FOR AGITATOR	1	AISI 304L
7	FLAT BLIND FLANGE UNI EN 1092-1 DN 300 PN 16 WITH PTFE GASKET	6	AISI 304L
8	LADDER HOLDER	1	AISI 304L
9	ADJUSTABLE FEET M40	6	AISI 304L
10	LIFTING HOOK	4	AISI 304L
11	WELD Ø1" FOR IN / OUT JACKET	8	AISI 304L
12	SOCKET Ø1"	1	AISI 304L
13	PROBE WELD Ø1/2" - L = 400 mm	1	AISI 304L
14	NAME PLATE "BEHALTER"	1	AISI 304L
15	ADJUSTABLE FEET M30	2	AISI 304L

INTERNAL FINISH = 2B - SMOOTH	PRODUCT DENSITY = max 1,200 Kg / liter
EXTERNAL FINISH = 2B - SMOOTH	WORKING PRESSURE: ATM
LEGS FINISH = 2B - SMOOTH	GASKETS: EPDM
MATERIAL: AISI 304L	INSIDE Ra ≤ 0,8 µm
INSULATION = DOUBLE LAYER MINERAL ROCK WOOL 50 + 40 mm	TYPE OF WELDING = STANDARD

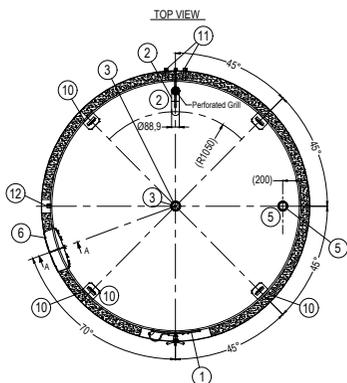

0	RELEASE	Francesco L.	30/05/25	-	Angelo D.	30/05/25
REV.	DESCRIPTION	DESIGNED	DATE	REVIEWED	CHECKED	DATE
 <p>Behälter K.G. Bremen GmbH Theodor-Barth-Str. 25 28307 Bremen Telefon (0421) 3 46 90 34 Telefax (0421) 3 46 90 36 www.behaeltler-kg.de mail@behaeltler-kg.de</p>		OBJECT: N.1 STAINLESS STEEL AISI 304L INSULATED STORAGE TANK HL 500 mod.SCO/PT WITH CONICAL TOP AND BOTTOM ON FEET M40				
ORDER : 066/25			NUMBER :-			
DRAW:		REV. 1	SCALE: 1:1			
						ALL QUOTES ARE EXPRESS IN mm (MILLIMETERS)